




R02AT

2 Steel Wire Braid

TUBE : MINERAL, VEGETABLE AND HYDRAULIC OIL RESISTANT SPECIAL SYNTHETIC RUBBER.
 REINFORCEMENT : 2 HIGH TENSILE STEEL WIRE BRAID.
 COVER : OIL, ABRASION AND WEATHER RESISTANT SPECIAL SYNTHETIC RUBBER.
 APPLICATION : FOR MEDIUM-HIGH PRESSURE HYDRAULIC SYSTEMS IN INDUSTRY AND AGRICULTURE.

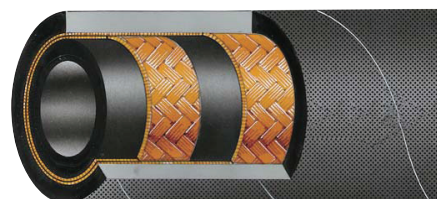

Dash Size	ID		ROD	OD	WP		BP		VACUUM	BR/r	W
	inch	mm	mm	mm	bar	psi	bar	psi	bar	mm	g/m
-03	3/16"	4.8	11.1	13.3	415	6018	1650	23925	-0.95	90	300
-04	1/4"	6.4	12.8	15	400	5800	1600	23200	-0.95	100	380
-05	5/16"	8	14.3	16.5	350	5075	1400	20300	-0.95	115	435
-06	3/8"	9.5	16.7	18.9	330	4785	1320	19140	-0.95	130	550
-08	1/2"	12.7	19.8	22.2	275	3988	1100	15950	-0.95	180	640
-10	5/8"	16	22.9	25.2	250	3625	1000	14500	-0.95	200	750
-12	3/4"	19	26.9	29.2	215	3118	850	12325	-0.80	240	925
-16	1"	25.4	34.8	37.2	165	2393	650	9425	-0.80	300	1290
-20	1 1/4"	31.8	44.3	47.3	125	1813	500	7250	-0.80	420	1895
-24	1 1/2"	38.1	50.7	53.7	90	1305	360	5220	-0.80	500	2120
-32	2"	50.8	63.5	66.7	78	1131	310	4500	-0.80	630	2765
-40	2 1/2"	63.5	75.8	79.3	69	1000	276	4000	-0.60	762	3730
-48	3"	76.2	87.8	91.3	50	725	200	2900	-0.60	900	3950



-40°C / +100°C (+125°C DISCONTINUOUS)
 -40°F / +212°F (+257°F DISCONTINUOUS)

MiCS R02AT TS 6387/EN 853 2SN ()** (DN ** mm) Max. W.P. *** Bar / **** PSI



Follow us on

Tagline in hose



SAE 100 R2 AT/DIN-EN 853 2SN 1/2" - DN13- WP 275 BAR / 3988 PSI